



CHOCKY BARS

PRODUCT DATA SHEET

DRAWING NO: PF-0002-1

REV NO: A

Phone: +1 469-269-2500
Fax: +1 469-200-8821

Web: www.cqmsrazer.com/usa

NOTE

Function


To reduce or eliminate wear in localized areas and in so doing, provide continued production capability to plant and equipment in a cost effective manner.

Features

- Most popular for replacing hard facing and clad plate.
- Is available with or without notched backing plate.
- Easily cut and shaped to fit over contoured surfaces (Refer Service Installation Procedure).
- Ideally suited for in situ repairs and/or installation into localized areas of extreme wear.
- 700 Brinell hardness Chrome Moly white iron metallurgically bonded to mild steel provides extreme levels of both abrasion and impact resistance.

Benefits


- Provides up to 6 times the life of conventional wear plates.
- Used for almost any application where abrasive wear is causing lost production through machine down time.

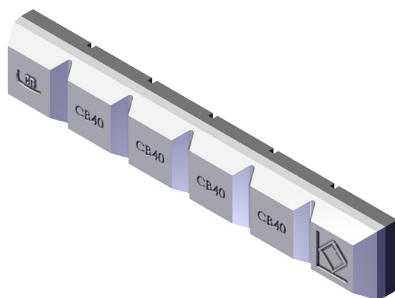

ISOMETRIC VIEW



SIDE VIEW

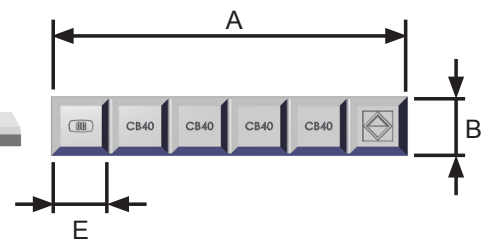

FRONT VIEW

PART No.	DIMENSIONS in/mm					DESCRIPTION	MASS (lbs/kg)
	A	B	C	D	E		
CB25N	9.45/ 240	1/ 25	0.6/ 15	0.31/ 8	1.57/ 40	CHOCKY BAR	2.2/ 1
CB40N	9.45/ 240	1.57/ 40	0.6/ 15	0.31/ 8	1.57/ 40	CHOCKY BAR	2.2/ 1
CB50N	9.45/ 240	1.97/ 50	0.6/ 15	0.31/ 8	1.57/ 40	CHOCKY BAR	4.4/ 2
CB65N	9.45/ 240	2.56/ 65	0.6/ 15	0.31/ 8	1.57/ 40	CHOCKY BAR	4.4/ 2
CB90N	9.45/ 240	3.54/ 90	0.6/ 15	0.31/ 8	1.57/ 40	CHOCKY BAR	6.6/ 3
CB100N	9.45/ 240	3.94/ 100	0.6/ 15	0.31/ 8	1.57/ 40	CHOCKY BAR	8.8/ 4
CB130N	9.45/ 240	5.12/ 130	0.6/ 15	0.31/ 8	1.57/ 40	CHOCKY BAR	11/ 5